

FARDELEUSE SANS SOUDURE HAUTE CADENCE



Fardeleuse automatique sans soudure équipée de :

- cellule pour film imprimé avec spot
- groupe de répartition et constitution des lots,
- groupe multi-files
- groupe de formation de la barquette inférieur,
- cadence : 30 fardeaux / minute sur 1 ligne, 60 / 90 fardeaux/ minute sur 2/ 3 pistes,

Fardeleuse pour :

- pots
- flacons,
- bouteilles,
- conserves,
- Etc...




PROPACK® s.a.s – 1 place d’Uranie – 94340 Joinville Tel : 01 43 75 47 66

Web : [http:// www.propack.fr](http://www.propack.fr) - mail : propack@propack.fr



- 1 Loose product feeding, arriving in line, on a side transfer belt, or at 90°.
- 2 Pneumatic anti-jamming unit with oscillating separating bars for proper channelling of the product.
- 3 Maximum accumulation sensor to check the incoming belt. Minimum accumulation sensor for each channel.
- 4 Alternated separation without mechanical gears.
- 5 High capacity blank magazine for flaps or trays, located on the bottom, with easy access to be refilled quickly.
- 6 Tray closed with glue points.
- 7 Film feeding by means of a pair of rollers powered by a brushless motor.
- 8 Precision pneumatic film cutting.
- 9 Neutral or printed film wrapping by means of a bar that can be adjusted according to the height of the product.
- 10 High energy output heat-shrinking tunnel.

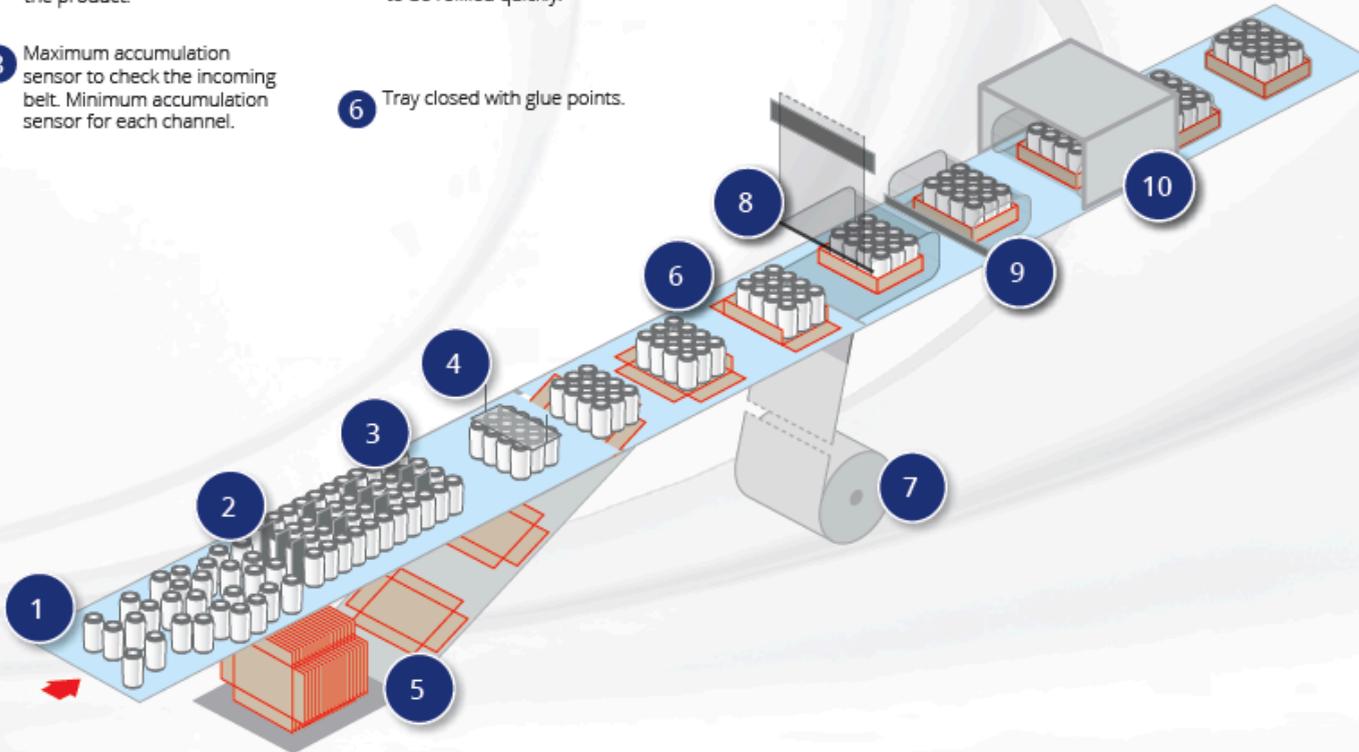

PROPACK® s.a.s – 1 place d’Uranie – 94340 Joinville Tel : 01 43 75 47 66

Web : [http:// www.propack.fr](http://www.propack.fr) - mail : propack@propack.fr

